

® = registered Trademark of Ciba Holding Inc.

# Tinuvin® 783

## Synergistic mixture of oligomeric hindered amine stabilizers

### Characterization

Tinuvin 783 is a synergistic mixture of Chimassorb® 944 and Tinuvin 622. It is a versatile light stabilizer with good extraction resistance, low gasfading and low pigment interaction. Tinuvin 783 is particularly well suited for LDPE, LLDPE, HDPE films, tapes and thick sections and for PP films. It is also the product of choice for thick sections where indirect food contact approval is required.

### Chemical name

Chimassorb 944: Poly[[6-[(1,1,3,3-tetramethylbutyl)amino]-1,3,5-triazine-2,4-diy]][(2,2,6,6-tetramethyl-4-piperidiny)imino]-1,6-hexanediyl[(2,2,6,6-tetramethyl-4-piperidiny)imino]]


Tinuvin 622: Butanedioic acid, dimethylester, polymer with 4-hydroxy-2,2,6,6-tetramethyl-1-piperidine ethanol

### CAS number

Preparation

### Structure

Chimassorb 944

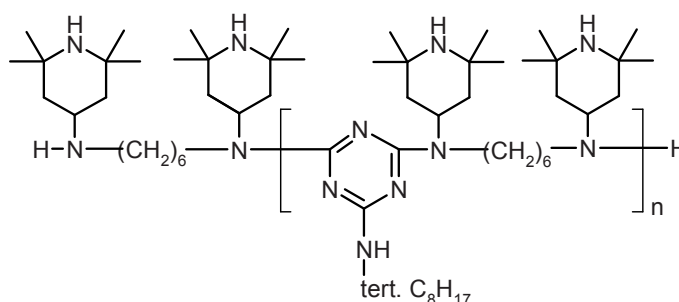


### Molecular weight

M<sub>n</sub> = 2000–3100 g/mol

### Structure

Tinuvin 622

and

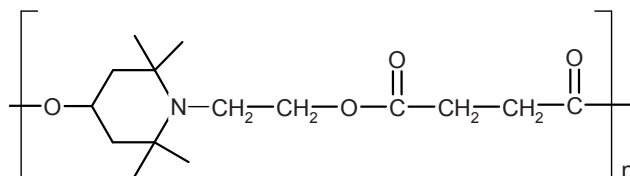

### Molecular weight

M<sub>n</sub> = 3100–4000 g/mol

**Applications**

Tinuvin 783 areas of application include polyolefins (PP, PE), olefin copolymers such as EVA as well as blends of polypropylene with elastomers, and PA.

**Features/benefits**

Tinuvin 783 is a versatile light stabilizer for thin and thick sections and delivers excellent cost/performance benefits. For applications requiring indirect food approvals, Tinuvin 783 can be used at levels not possible with other conventional HALS.

The synergism between the two high molecular weight HALS components of Tinuvin 783 helps to provide an efficient stabilization to the polymer against degradation through UV radiation and long term heat exposure.

**Product forms**

Code: Tinuvin 783 FDL  
Appearance: white to slightly yellow pastilles

**Guidelines for use**

Thick sections*:	UV stabilization of HDPE, LLDPE, LDPE and PP	0.05–1 %
Films*:	UV stabilization of LLDPE and PP	0.1–1.0 %
Tapes:	UV stabilization of PP and HDPE	0.1–0.8 %
Fibers:	UV stabilization of PP	0.1–1.4 %

\* *The presence of a UV absorber (e. g. Tinuvin 326/328 or Chimassorb 81) is recommended in un-pigmented or slightly pigmented articles or to improve the light fastness of certain organic pigments.*

**Physical properties**

Melting range: 55–140 °C  
Flashpoint (DIN 51758): 192 °C  
Bulk density: 514 g/l

**Handling & Safety**

In accordance with good industrial practice, handle with care and avoid unnecessary personal contact. Avoid continuous or repetitive breathing of dust. Use only with adequate ventilation. Avoid dust formation and ignition sources.

For more detailed information please refer to the material safety data sheet.

**Note**

The descriptions, designs, data and information contained herein are presented in good faith, and are based on BASF's current knowledge and experience. They are provided for guidance only, and do not constitute the agreed contractual quality of the product or a part of BASF's terms and conditions of sale. Because many factors may affect processing or application/use of the product, BASF recommends that the reader carry out its own investigations and tests to determine the suitability of a product for its particular purpose prior to use. It is the responsibility of the recipient of product to ensure that any proprietary rights and existing laws and legislation are observed. No warranties of any kind, either expressed or implied, including, but not limited to, warranties of merchantability or fitness for a particular purpose, are made regarding products described or designs, data or information set forth herein, or that the products, descriptions, designs, data or information may be used without infringing the intellectual property rights of others. Any descriptions, designs, data and information given in this publication may change without prior information. The descriptions, designs, data and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained, all such being given and accepted at the reader's risk.

November 2010